


Ficha Técnica / Data Sheet

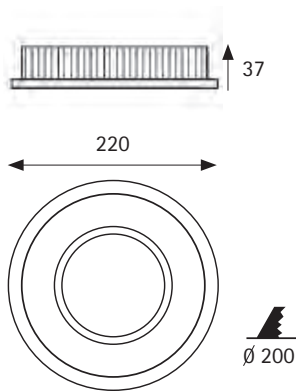

Ref.	50625
Colección / Collection	Technical Indoor. Architectural
Descripción / Description	Downlight Ambiente Baja Luminancia Redondo / Recessed Downlight Ambience Round
Material	Aluminio / Aluminium
Colores / Colours	90-Blanco Téc. / Tec. White
Wattios / System Power	25W
Lumens	50625-2983 1835 lm 50625-2984 1932 lm
Tipo LED / Lighting Source Type	EDISON SMD
Temperatura de Color / Color Temperature	50625-2983 3000K 50625-2984 4000K
IRC / CRI (Ra)	>80
Grados Apertura / Opening Degrees	110°
IP ext	44
IP int	20
Acabado Óptica / Difusor Finish	ACID
Material Óptica / Difusor Material	PMMA ACRILIC
Driver Externo / External Driver	JISO - INCLUDED
Factor de Potencia / PF	>0,9
Dimmable	No
Corriente trabajo / Working Current	700 mA
Input Voltage	AC100- 240V 50/60Hz
Vida Útil / Service Life	50.000 H
Garantía / Warranty	3 Years
Operating Temper.	-20°C TO +45°C
Working Humidity	20-90% RH
Diametro Exterior / Ext. Diameter	220 mm
Altura / Height	37 mm
Corte de techo / Ceiling Cut	200 mm
Peso / Weight Kg	0,64
Pcs/Ctn	1/10

OTRAS OPCIONES / OTHER OPTIONS

Consultar pedido mínimo, precio y plazo / Please consult MOQ, price and delivery time

Otro Driver / Other Driver	ELT, BOKE
Driver Dimmable / Dimmable Driver	1-10V/Push Dali
Kit Emergencia / Emergency Kit	1h / 3h
Bluetooth	Yes