


LED COB	35°	
D/m	H/m	E <sub>max</sub> /lux
0,68	1	1350
1,36	2	338
2,05	3	150

LUX FOR COB

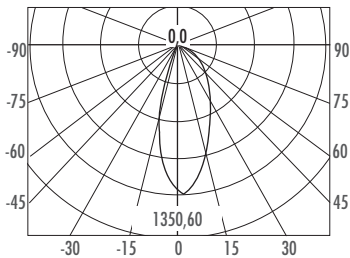

Ref.	54110
Colección / Collection	Architectural
Descripción / Description	Downlight empotrable LED COB cuadrado Recessed Downlight squared LED COB
Material	Aluminio / Aluminium
Colores / Colours	90-Blanco Téc. / Tec. White
Wattios / System Power	10W
Lumens	54110-2983 802 lm 54110-2984 844 lm
Tipo LED / Lighting Source Type	GENESIS COB
Temperatura de Color / Color Temperature	54110-2983 3000K 54110-2984 4000K
IRC / CRI (Ra)	>80
Grados Apertura / Opening Degrees	35°
IP	IP20
Acabado Óptica / Difusor Finish	TRASPARENT
Material Óptica / Difusor Material	GLASS
Driver Externo / External Driver	ELT - MADE IN SPAIN
Corriente trabajo / Working Current	300 mA
Input Voltage	AC100- 240V 50-60Hz
Vida Útil / Service Life	30.000 H.
Garantía / Warranty	3 Years
Operating Temper.	-20° TO +60°
Working Humidity	20-85% RH
Diametro Exterior / Ext. Diameter	115x115 mm
Altura / Height	84 mm
Corte de techo / Ceiling Cut	95x95 mm
Peso / Weight Kg	0,35
Pcs/Ctn	1 - 40
<b>OTRAS OPCIONES / OTHER OPTIONS</b>	
<i>Consultar pedido minimo, precio y plazo / Please consult MOQ, price and delivery time</i>	
Sin Driver / Whithout Driver	No
Driver Dimmable / Dimmable Driver	1-10V Dali Push
Kit Emergencia / Emergency Kit	1h / 3h
Otras Temperaturas de Color / Other Colour Temperature	6000K
Otros Acabados / Other Colour	01 Negro / Black 04 Aluminio / Aluminium
Otros Driver / Other Driver	STANDARD - MEAN WELL - TCI - TRIDONIC